

**Scooter
Street Bike
Off-Road
Tricycle**



**MOTORCYCLE
TIRES**
All Sizes

Catalogue

Sunik International Pvt. Ltd.





SCOOTER TYRES



SU-08

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-10	4PR 51J TT/TL	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TT/TL	3.6/92	17.2/437	494/224	40/2.8	2.50X10		*



SU-10

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-10	4PR 51J TT/TL	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TT/TL	3.6/92	17.2/437	494/224	40/2.8	2.50X10		*



SU-18

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-10	4PR 42J TT/TL	3.1/80	16.3/413	331/150	36/2.5	2.15X10		*
3.00-10	6PR 47J TT/TL	3.1/80	16.3/413	386/175	40/2.8	2.15X10		*



SU-037

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-8	4PR TT/TL	3.6/92	15.2/386	375/170	33/2.3	2.50X8	*	*
3.50-8	6PR TT/TL	3.6/92	15.2/386	430/195	40/2.8	2.50X8		*
3.50-10	4PR 51J TT/TL	3.6/92	17.2/437	430/195	26/2.5	2.50X10		*
3.50-10	6PR 56J TT/TL	3.6/92	17.2/437	494/224	40/2.8	2.50X10		*



SCOOTER TYRES

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
120/70-12	4PR 51J TT/TL	4.8/122	18.6/473	430/195	33/2.3	3.50X12		*
120/70-12	6PR 58J TT/TL	4.8/122	18.6/473	520/236	40/2.8	3.50X12		*
130/70-12	4PR 56J TT/TL	5.1/129	19.1/486	454/206	33/2.3	3.50X12		*
130/70-12	6PR 62P TT/TL	5.1/129	19.2/487	584/265	40/2.8	3.50X12		*
130/70-13	4PR 57M TT/TL	5.1/129	20.2/512	507/230	33/2.3	3.50X13		*
130/70-13	6PR 63P TT/TL	5.1/129	20.2/512	600/272	40/2.8	3.50X13		*
110/90-13	4PR 56J TT/TL	4.3/109	20.8/528	494/224	33/2.3	2.50X13		*
110/90-13	6PR 62J TT/TL	4.3/109	20.8/528	584/265	36/2.5	2.50X13	*	*



SU-61B

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-10	4PR 51J TL	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TL	3.6/92	17.2/437	494/224	40/2.8	2.50X10		*
110/90-10	6PR 59J TL	4.1/101	17.1/434	536/243	40/2.8	2.50X10		*
120/90-10	56J TT/TL	4.7/119	18.5/470	494/224	25/1.75	2.75X10		*
120/90-10	66J TT/TL	4.7/119	18.5/470	661/300	36/2.5	2.75X10		*



SU-104

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
90/90-12	4PR 54J TT/TL	3.5/90	18.4/467	467/212	36/2.5	2.15X12		*
90/90-12	6PR 59J TT/TL	3.5/90	18.4/367	536/243	40/2.8	2.15X12		*



SU-105

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-10	4PR 51J TT	3.6/92	17.2/437	430/195	36/2.5	2.15X10		*
3.50-10	6PR 56J TT	3.6/92	17.2/437	494/224	40/2.8	2.15X10		*



SU-114



SCOOTER TYRES

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-10	4PR 51J TL	3.6/92	17.2/437	430/195	33/2.3	2.50X10		*
3.50-10	6PR 56J TL	3.6/92	17.2/437	494/224	40/2.8	2.50X10		*



SU-115

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-10	4PR 42J TT/TL	3.1/80	17.2/437	331/150	36/2.5	2.15X10		*
3.00-10	6PR 47J TT/TL	3.6/92	17.2/437	494/224	40/2.8	2.15X10		*
3.50-10	4PR 51J TT/TL	3.6/90	17.1/434	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TT/TL	3.6/92	18.5/470	494/224	40/2.8	2.50X10		*



SU-117

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-10	4PR 51J TT/TL	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TT/TL	3.6/92	17.2/437	494/224	40/2.8	2.50X10		*



SU-118A

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-10	4PR 51J TT/TL	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TT/TL	3.6/92	17.2/437	494/224	40/2.8	2.50X10		*
120/90-10	56J TT/TL	4.7/119	4.7/119	294/224	25/1.75	2.75X10		*
120/90-10	66J TT/TL	4.7/119	4.7/119	661/300	36/2.5	2.75X10		*
130/90-10	61J TT/TL	5.1/129	5.1/129	567/257	25/1.75	3.00X10		*
130/90-10	70J TT/TL	5.1/129	5.1/129	739/335	33/2.3	3.00X10		*
140/90-10	70J TT/TL	5.5/140	5.5/140	739/335	40/2.8	3.00X10		*



SU-120



SCOOTER TYRES



SU-120-1

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
120/70-12	51J TT/TL	3.6/92	4.8/122	18.6/473	33/2.3	3.50X12		*
130/70-12	56J TT/TL	3.6/92	5.1/129	19.2/487	33/2.3	3.50X10		*



SU-133

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
130/60-13	4PR 53J TT/TL	5.1/129	19.1/486	454/206	33/2.3	3.50X13		*
130/60-13	6PR 60J TT/TL	5.1/129	19.1/486	550/250	33/2.3	3.50X13		*



SU-137

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-10	4PR 51J TT/TL	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TT/TL	3.6/92	17.2/437	494/224	40/2.8	2.50X10		*



SU-181

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
120/90-10	56J TT/TL	4.7/119	18.5/470	494/224	25/1.75	2.75X10		*
120/90-10	66J TT/TL	4.7/119	18.5/470	661/300	36/2.5	2.75X10		*

SCOOTER TYRES



Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-10	4PR 42J TT/TL	3.1/80	16.3/413	331/150	36/2.5	2.15X10		*
3.00-10	6PR 47J TT/TL	3.1/80	16.3/413	386/175	40/2.8	2.15X10		*



Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-10	4PR 42J TT/TL	3.1/180	16.3/413	331/150	36/2.5	2.15X10		*
3.00-10	6PR 47J TT/TL	3.1/180	16.3/413	386/175	40/2.8	2.15X10		*



Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-10	4PR 51J TT	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TT	3.6/92	17.2/437	494/224	40/2.8	2.50X10		*



Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-10	4PR 42J TT/TL	3.1/80	16.3/413	331/150	26/2.5	2.15X10		*
3.00-10	6PR 47J TT/TL	3.1/80	16.3/413	386/175	40/2.8	2.15X10		*
3.50-10	4PR 51J TT/TL	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TT/TL	3.6/92	17.2/437	494/224	40/2.8	2.50X10		*

SCOOTER TYRES



SU-216

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-10	4PR 42J TT/TL	3.1/80	16.3/413	331/150	36/2.5	2.15X10		*
3.00-10	6PR 47J TT/TL	3.1/80	16.3/413	386/175	40/2.8	2.15X10		*
3.50-10	4PR 51J TT/TL	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TT/TL	3.6/92	17.2/437	494/224	40/2.8	2.50X10		*



SU-299

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-10	4PR 51J TL	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TL	3.6/92	17.2/437	494/224	40/2.8	2.50X10		*
100/90-10	4PR 56J TL	4.1/101	17.1/434	494/224	36/2.5	2.50X10		*
100/90-10	6PR 59J TL	4.1/101	17.2/434	536/243	40/2.8	2.50X10		*



SU-311

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
130/60-13	4PR 53J TT/TL	5.1/129	19.1/486	454/206	33/2.3	3.50X13		*
130/60-13	6PR 60J TT/TL	5.1/129	19.1/486	550/250	33/2.3	3.50X13		*



SU-403

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-8	4PR TT	3.1/80	14.3/362	291/132	33/2.3	2.15X8		*
3.00-8	6PR TT	3.1/80	14.3/362	342/155	40/2.8	2.15X8		*
3.50-12	4PR TT	3.1/80	18.3/464	386/175	33/2.3	2.15X12		*
3.50-12	6PR TT	3.1/80	18.3/464	441/200	40/2.8	2.15X12		*

SCOOTER TYRES



SU-413

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-10	4PR 42J TT/TL	3.1/80	16.3/413	331/150	36/2.5	2.15X10		*
3.00-10	6PR 47J TT/TL	3.1/80	16.3/413	386/175	40/2.8	2.15X10		*
3.50-10	4PR 51J TT/TL	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TT/TL	3.6/92	17.2/437	494/224	40/2.8	2.50X10		*
100/80-10	4PR 52J TT/TL	4.0/101	16.3/414	441/200	36/2.5	2.50X10		*
110/80-10	4PR 58J TT/TL	4.3/109	16.9/430	520/236	36/2.5	2.50X10		*
120/90-10	56J TT/TL	4.7/119	18.5/470	494/224	25/1.75	2.75X10		*
120/90-10	66J TT/TL	4.7/119	18.5/470	661/300	36/2.5	2.75X10		*
130/70-10	4PR 52J TT/TL	5.1/129	17.2/436	441/200	33/2.3	3.50X10		*
130/70-10	6PR 59J TT/TL	5.1/129	17.2/436	536/243	40/2.8	3.50X10		*
130/90-10	61J TT/TL	5.1/129	19.2/488	567/257	25/1.75	3.00X10		*
130/90-10	70J TT/TL	5.1/129	19.2/488	739/335	33/2.3	3.00X10		*
110/80-12	4PR 61J TT/TL	4.3/109	18.9/481	567/257	36/2.5	2.50X12		*
110/90-12	4PR 64J TT/TL	4.3/109	19.8/503	617/280	36/2.5	2.50X12		*
140/70-12	4PR 60J TT/TL	5.3/139	19.7/501	551/250	33/2.3	3.75X12		*
140/70-12	6PR 65J TT/TL	5.3/139	19.7/501	639/290	40/2.8	3.75X12		*
120/70-13	4PR 53M TT/TL	4.8/122	19.6/498	454/206	33/2.3	3.50X13		*
140/60-13	4PR 57M TT/TL	5.5/139	19.6/498	507/230	33/2.3	3.75X13		*
140/60-13	4PR 57P TT/TL	5.5/139	19.6/498	507/230	33/2.3	3.75X13		*



SU-681

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-10	4PR 51J TT/TL	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TT/TL	3.6/92	17.2/437	494/224	40/2.8	2.50X10		*
110/90-10	6PR 66J TT/TL	4.3/109	17.8/452	661/300	40/2.8	2.50X10		*
110/90-10	8PR 66J TT/TL	4.3/109	17.8/452	661/300	44/3.1	2.50X10		*





SCOOTER TYRES



SU-687

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
110/70-12	4PR 47J TL	4.3/110	18.1/459	386/175	33/2.3	3.00X12		*
110/70-12	6PR 56M TL	4.3/110	18.1/459	494/224	40/2.8	3.00X12		*



SU-688

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
120/70-12	4PR 51J TL	4.8/122	18.6/473	430/195	33/2.3	3.50X12		*
120/70-12	6PR 58J TL	4.8/122	18.6/473	520/236	40/2.8	3.50X12		*
130/60-13	4PR 53J TL	5.1/129	19.1/486	454/206	33/2.3	3.50X13		*
130/60-13	6PR 60J TL	5.1/129	19.1/486	550/250	33/2.3	3.50X13	*	*



SU-689

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.00-10	4PR TT	4.1/105	18.3/466	521/250	36/2.5	2.50X10		*
4.00-10	6PR TT	4.1/105	18.3/466	639/290	40/2.8	2.50X10		*
4.00-12	4PR TT	4.1/105	20.4/517	617/280	36/2.5	2.50X12		*
4.00-12	6PR TT	4.1/105	20.4/517	739/335	40/2.8	2.50X12		*
4.00-12	8PR TT	4.1/105	20.4/517	783/355	44/3.1	2.50X12		*



SU-403

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
100/90-10	4PR 56J TT/TL	4.1/101	17.1/434	494/224	36/2.5	2.50X10		*
100/90-10	6PR 59J TT/TL	4.1/101	17.1/434	536/243	40/2.8	2.50X10		*

SCOOTER TYRES



SU-711

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-10	4PR 51J TT/TL	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TT/TL	3.6/92	17.2/437	494/224	40/2.8	2.50X10		*
90/90-10	4PR 50J TT/TL	3.5/90	16.4/416	419/190	36/2.5	2.15X16		*
90/90-10	6PR 54J TT/TL	3.5/90	16.4/416	467/212	40/2.8	2.15X16		*



SU-712

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-8	4PR TT/TL	3.6/92	15.2/386	375/170	33/2.3	3.50X12		*
3.50-8	6PR TT/TL	3.6/92	15.2/386	375/170	40/2.8	3.50X12		*
3.50-10	4PR 51J TT/TL	3.6/92	17.2/437	430/195	33/2.5	3.50X13		*
3.50-10	6PR 46J TT/TL	3.6/92	17.2/437	494/224	40/2.8	3.50X13	*	*



SU-717

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-10	4PR 51J TT/TL	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TT/TL	3.6/92	17.2/437	495/224	40/2.8	2.50X10		*



SU-718

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-10	4PR 51J TT/TL	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TT/TL	3.6/92	17.2/437	494/224	40/2.8	2.50X10		*



SCOOTER TYRES



SU-719

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-10	4PR 51J TT/TL	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TT/TL	3.6/92	17.2/437	495/224	40/2.8	2.50X10		*



SU-720

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-10	4PR 51J TT/TL	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TT/TL	3.6/92	17.2/437	495/224	40/2.8	2.50X10		*



SU-724

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-10	4PR 51J TT/TL	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TT/TL	3.6/92	17.2/437	495/224	40/2.8	2.50X10		*



SU-718

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-10	4PR 51J TL	3.6/92	17.2/437	430/195	36/2.5	2.50X10		*
3.50-10	6PR 56J TL	3.6/92	17.2/437	494/224	40/2.8	2.50X10		*
100/90-10	4PR 56J TL	4.1/101	17.1/434	498/224	36/2.5	2.50X10		*
100/90-10	6PR 59J TL	4.1/101	17.1/434	536/243	40/2.8	2.50X10		*



SCOOTER TYRES



SU-803

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
120/90-10	56J TT/TL	4.7/119	18.5/470	494/224	25/1.75	2.75X10		*
120/90-10	66J TT/TL	4.7/119	18.5/470	661/300	36/2.5	2.75X10		*
130/90-10	61J TT/TL	5.1/129	19.2/488	567/257	25/1.75	3.00X10		*
130/90-10	70J TT/TL	5.1/129	19.2/488	739/335	33/2.3	3.00X10		*
130/70-12	4PR 56J TT/TL	5.1/129	19.2/487	454/206	33/2.3	3.50X12		*
130/70-12	6PR 62J TT/TL	5.1/129	19.1/486	584/265	40/2.8	3.50X12		*
110/80-12	4PR 61J TT/TL	4.3/109	18.9/481	567/257	36/2.5	2.50X12		*
140/70-12	4PR 60J TT/TL	5.3/139	19.7/501	551/250	33/2.3	3.75X12		*
140/70-12	6PR 65J TT/TL	5.3/139	19.7/501	639/290	40/2.8	3.75X12		*
140/60-13	4PR 57M TT/TL	5.5/139	19.6/498	507/230	33/2.3	3.75X13		*
140/60-13	4PR 57P TT/TL	5.5/139	19.6/498	507/230	33/2.3	3.75X13		*
140/70-14	4PR 62L TT/TL	5.5/139	20.6/524	617/280	33/2.3	3.75X14		*
140/70-14	6PR 68S TT/TL	5.5/139	20.6/524	694/315	40/2.8	3.75X14		*



SU-803B

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
110/70-12	4PR 47J TL	4.3/110	18.1/459	386/175	33/2.3	3.00X12		*
110/70-12	6PR 56M TL	4.3/110	18.1/459	494/224	40/2.8	3.00X12		*
120/70-12	4PR 51J TT/TL	4.8/122	18.6/473	430/195	33/2.3	3.50X12		*
120/70-12	6PR 58J TT/TL	4.8/122	18.6/473	520/236	40/2.8	3.50X12		*
120/70-14	4PR 55P TT/TL	4.8/122	20.3/524	481/218	33/2.3	3.50X14		*
120/70-14	6PR 61P TT/TL	4.8/122	20.3/524	567/257	40/2.8	3.50X14		*



STREET TYRES



SU-007

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.75-14	4PR 35P TT	3.0/75	20.2/512	267/121	33/2.3	1.85X14		*
2.75-14	6PR 41P TT	3.0/75	20.2/512	320/145	40/2.8	1.85X14		*



SU-0001

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
100/90-18	4PR 56P TT/TL	4.0/101	25.1/637	494/224	33/2.3	2.50X18		*
100/90-18	6PR 62P TT/TL	4.0/101	25.1/637	584/265	40/2.8	2.50X18		*



SU-0002

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
110/80-14	48S TT/TL	4.0/101	20.3/516	397/180	33/2.3	2.50X14		*
110/80-14	59P TT/TL	4.3/109	20.9/532	535/243	40/2.8	2.50X14		*
120/80-14	58S TT/TL	4.7/119	21.6/548	520/236	33/2.3	2.75X14		*
110/70-17	54H TT/TL	4.3/110	23.1/586	467/212	40/2.8	3.00X17		*



SU-0004

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
130/70-17	62L TT/TL	5.5/139	24.7/628	661/300	40/2.8	3.50X17		*
130/70-17	62H TT/TL	5.5/139	24.7/628	661/300	40/2.8	3.50X17		*



STREET TYRES



SU-0005

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
140/70-17	4PR 66P TT/TL	5.5/139	24.7/628	661/300	33/2.3	3.75X17		*
140/70-17	6PR 72P TT/TL	5.5/139	24.7/628	739/335	40/2.8	3.75X17		*



SU-0007

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
2.75-18	4PR 42P TT	3.0/75	24.1/613	331/150	33/2.3	1.85X18		*
2.75-18	6PR 48L TT	3.0/75	24.1/613	397/180	40/2.8	1.85X18	*	*



SU-0011

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
80/100-14	4PR 43J TT	3.1/180	20.3/516	342/155	33/2.3	1.85X14		*
80/100-14	6PR 49L TT	3.1/180	20.3/516	407/185	33/2.3	1.85X14	*	*
60/100-17	4PR TT	2.4/61	21.7/552	254/115	33/2.3	1.60X17		*
60/100-17	6PR TT	2.4/61	21.7/552	300/136	40/2.8	1.60X17		*



SU-0013

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
90/90-18	4PR 51P TT/TL	3.5/90	24.4/619	430/195	33/2.3	2.15X18		*
90/90-18	6PR 57P TT/TL	3.5/90	24.4/619	507/230	40/2.8	2.15X18		*



STREET TYRES



SU-0014

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
90/90-18	4PR 51P TT/TL	3.5/90	24.4/619	630/195	32/2.25	2.15X18		*
90/90-18	6PR 57P TT/TL	3.5/90	24.4/619	507/230	32/2.25	2.18X18	*	*
80/100-18	4PR 47P TT/TL	3.1/80	24.3/617	386/175	33/2.3	1.85X18		*
2.75-18	4PR 42P TT/TL	3.0/75	24.1/613	331/150	32/2.25	1.85X18		*
2.75-18	6PR 48L TT/TL	3.0/75	24.1/613	397/180	32/2.25	1.85X18	*	*
2.75-18	8PR 51P TT/TL	3.0/75	24.1/613	430/195	44/3.1	1.85X18		*



SU-018

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
110/90-16	4PR 59P TT/TL	4.3/109	23.8/604	536/243	33/2.3	2.50X16		*
110/90-16	6PR 65P TT/TL	4.3/109	23.8/604	639/290	40/2.8	2.50X16		*



SU-024

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.25-16	4PR 31L TT	2.4/61	20.9/532	239/109	33/2.3	1.60X16		*



SU-026A

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.25-18	4PR 52P TT/TL	3.5/89	25.2/639	441/200	33/2.3	2.15X18		*
3.25-18	6PR 59P TT/TL	3.5/89	25.2/639	535/243	40/2.8	2.15X18	*	*
90/90-18	4PR 51P TT/TL	3.5/90	24.4/619	430/195	32/2.25	2.15X18		*
90/90-18	6PR 57P TT/TL	3.5/90	24.4/619	507/230	32/2.25	2.15X18	*	*

STREET TYRES



SU-061

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
80/100-14	4PR 43J TT	3.1/80	20.3/516	342/155	33/2.3	1.85X14		*
80/100-14	6PR 49L TT	3.1/80	20.3/516	407/185	33/2.3	1.85X14	*	*
2.50-17	4PR 38P TT	2.6/65	22.4/568	291/132	32/2.25	1.60X17		*
2.50-17	6PR 43J TT	2.6/65	22.4/568	341/155	32/2.25	1.60X17	*	*
2.50-17	8PR 45P TT	2.6/65	22.4/568	364/165	44/3.1	1.60X17		*
2.75-17	4PR 41P TT/TL	3.0/75	23.1/588	320/145	32/2.25	1.85X17		*
2.75-17	6PR 47J TT/TL	3.0/75	23.1/588	385/175	32/2.25	1.85X17	*	*
2.75-18	4PR 42P TT/TL	3.0/75	24.1/618	331/150	32/2.25	1.85X18		*
2.75-18	6PR 48L TT/TL	3.0/75	24.1/618	396/180	32/2.25	1.85X18	*	*
2.75-18	8PR 51P TT/TL	3.0/75	24.1/618	430/195	44/3.1	1.85X18		*
3.00-17	4PR 45P TT/TL	3.1/80	23.7/602	364/165	32/2.25	1.85X17		*
3.00-17	6PR 50P TT/TL	3.1/80	23.7/602	418/190	32/2.25	1.85X17		*
90/90-17	4PR 50P TT/TL	3.5/90	23.4/594	419/190	33/2.3	2.15X17		*
3.00-18	4PR 47P TT/TL	3.1/80	24.7/627	386/175	32/2.25	1.85X18		*
3.00-18	6PR 52L TT/TL	3.1/80	24.7/627	440/200	32/2.25	1.85X18	*	*
3.00-18	8PR 55P TT/TL	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*
90/90-18	4PR 51P TT/TL	3.5/90	24.4/619	430/195	32/2.25	2.15X18		*
90/90-18	6PR 57P TT/TL	3.5/90	24.4/619	507/230	32/2.25	2.15X18		*
4.10-18	4PR 58P TT	4.1/104	25.2/639	520/236	33/2.3	2.15X18		*
4.10-18	6PR 63P TT	4.1/104	25.2/639	600/272	40/2.8	2.15X18		*
90/90-21	4PR 54P TT/TL	3.5/90	27.4/695	467/212	33/2.3	2.15X21		*
2.75-21	6PR 52P TT	3.0/7.5	27.1/689	441/200	44/2.8	1.85X21		*



SU-061B

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
100/90-16	4PR 54P TT/TL	4.0/101	23.1/586	467/212	33/2.3	2.50X16		*
110/80-17 (4.10-17)	6PR 57P TT/TL	4.3/109	23.9/608	507/230	33/2.3	2.50X17		*
100/90-17	4PR 55P TT/TL	4.0/101	24.1/612	481/218	33/2.3	2.50X17		*
120/80-17 (4.60-17)	4PR 61P TT/TL	4.7/119	24.6/624	567/257	33/2.3	2.75X17		*
100/90-17	6PR 61P TT/TL	4.0/101	24.1/612	567/257	40/2.8	2.50X17		*
120/90-17	6PR 64H TT/TL	4.7/119	25.5/648	617/280	40/2.8	2.75X17		*
130/80-17	4PR 65H TT/TL	5.1/129	25.2/640	639/290	33/2.3	3.00X17		*
120/80-17	4PR 61S TT/TL	4.7/119	24.6/624	567/257	36/2.5	2.75X17		*
120/80-17	6PR 67H TT/TL	4.7/119	24.6/624	677/307	40/2.8	2.75X17		*
130/70-17	4PR 62L TT/TL	5.5/139	24.7/628	661/300	40/2.8	3.50X17	*	*
110/80-18	4PR 58H TT/TL	4.3/109	24.9/633	520/236	33/2.3	2.50X18		*
100/90-18	4PR 56P TT/TL	4.0/101	25.1/637	494/224	33/2.3	2.50X18		*
100/90-18	6PR 62P TT/TL	4.0/101	25.1/637	584/265	40/2.8	2.50X18		*
120/80-18	4PR 62H TT/TL	4.7/119	25.6/649	284/265	33/2.3	2.75X18		*
130/80-18	4PR 66P TT/TL	5.1/129	26.2/665	661/300	33/2.3	3.00X18		*
100/90-19	4PR TT/TL	4.0/101	26.1/663	507/230	33/2.3	2.50X19		*
100/90-19	6PR TT/TL	4.0/101	26.1/663	600/272	40/2.8	2.50X19		*



STREET TYRES



SU-014

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.75-14	4PR 35P TT	3.0/75	20.2/512	267/121	33/2.3	1.85X14		*
2.75-17	6PR 41P TT	3.0/75	20.2/512	320/145	40/2.8	1.85X14		*



SU-042

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.75-18	4PR 42P TT	3.0/75	24.1/613	331/150	33/2.3	1.85X18		*
2.75-18	6PR 48L TT	3.0/75	24.1/613	396/180	40/2.8	1.85X18		*



SU-053

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-18	4PR 47P TT	3.1/80	24.7/627	386/175	33/2.3	1.85X18		*
3.00-18	6PR 52P TT	3.1/80	24.7/627	441/200	40/2.8	1.85X18		*
3.00-18	8PR 55P TT	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*



SU-050

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
130/90-15	4PR 66P TT	5.1/129	24.2/615	661/300	33/2.3	3.00X15		*
130/90-15	6PR 72P TT	5.1/129	24.2/615	783/355	40/2.8	3.00X15		*



STREET TYRES



SU-014

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
160/60-17	69P TL	6.3/161	24.6/624	717/325	40/2.8	4.50X17		*



SU-062

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
1.70/80-15	77H TT/TL	6.7/170	25.7/653	908/412	40/2.8	4.00X15		*



SU-053

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
150/80-15	67P TT/TL	5.9/150	24.4/621	882/400	40/2.8	3.50X15		*



SU-071

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.50-18	4PR 40P TT	2.6/65	23.3/593	309/140	33/2.3	1.60X18		*
2.50-18	6PR 45P TT	2.6/65	23.3/593	364/165	40/2.8	1.60X18		*



STREET TYRES



Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
120/60-17	55P TT/TL	4.8/122	23.6/576	481/218	33/2.3	3.50X17		*



Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
3.25-18	4PR 52P TT	3.5/89	25.2/639	441/200	33/2.3	2.15X18		*
3.25-18	6PR 59P TT	3.5/89	25.2/639	535/243	40/2.8	2.15X18	*	*



Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
100/90-18	4PR 56P TT/TL	4.0/101	25.1/637	494/224	33/2.3	2.50X18		*
100/90-18	6PR 62P TT/TL	4.0/101	25.1/637	584/265	40/2.8	2.50X18		*



Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
150/60-18	66P TL	5.9/151	25.1/637	739/335	33/2.3	2.25X18		*



STREET TYRES



SU-106

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
90/90-18	4PR 51P TT	3.5/90	24.4/619	430/195	32/2.25	2.15X18		*
90/90-18	6PR 57P TT	3.5/90	24.4/619	507/230	32/2.25	2.15X18	*	*



SU-106B

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
140/60-18	64P TT/TL	5.5/139	24.6/625	6.7/280	33/2.3	3.25X18		*



SU-107

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
110/70-17	54H TT/TL	4.3/110	23.1/586	467/212	40/2.8	3.00X17		*
140/70-17	4PR 66P TT/TL	5.5/139	24.7/628	661/300	33/2.3	3.75X17		*
140/70-17	6PR 72P TT/TL	5.5/139	24.7/628	739/335	40/2.8	3.75X17		*



SU-108

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.75-18	4PR 42P TL	3.0/75	24.1/613	331/150	33/2.3	1.85X18		*
2.75-18	6PR 48P TL	3.0/75	24.1/613	397/180	40/2.8	1.85X18		*



STREET TYRES



SU-110

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-18	4PR 47P TL	3.1/80	24.7/627	386/175	33/2.3	1.85X18		*
3.00-18	6PR 52P TL	3.1/80	24.7/627	441/200	40/2.8	1.85X18		*
3.00-18	8PR 55P TL	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*



SU-120

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
130/80-15	4PR 63P TT/TL	5.1/129	23.2/589	600/272	33/2.3	3.00X15		*
130/90-15	4PR 66P TT/TL	5.1/129	24.2/615	661/300	33/2.3	3.00X15		*
130/90-15	6PR 72P TT/TL	5.1/129	24.2/615	783/355	40/2.8	3.00X15		*
110/90-16	4PR 59P TT/TL	4.3/109	23.8/604	536/243	33/2.3	2.50X16		*
110/90-16	6PR 65P TT/TL	4.3/109	23.8/604	639/290	40/2.8	2.50X16		*
120/80-16	4PR 60P TT/TL	4.3/109	23.5/598	551/250	33/2.3	2.75X16		*
120/80-16	6PR 66P TT/TL	4.3/109	23.5/598	661/300	40/2.8	2.75X16		*



SU-120B

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
110/90-16	4PR 59P TT/TL	4.3/109	23.8/604	536/243	33/2.3	2.50X16		*
110/90-16	6PR 65P TT/TL	4.3/109	23.8/604	639/290	40/2.8	2.50X16		*



STREET TYRES



SU-123

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.25-17	4PR 33L TT	2.4/61	21.9/556	254/115	33/2.3	1.60X17		*
2.50-17	4PR 38P TT	2.6/65	22.4/568	291/132	32/2.25	1.60X17		*
2.50-17	6PR 43J TT	2.6/65	22.4/568	341/155	32/2.25	1.60X17	*	*
2.75-17	4PR 41P TT	3.0/75	23.1/588	320/145	32/2.25	1.85X17		*
2.75-17	6PR 47J TT	3.0/75	23.1/588	385/175	32/2.25	1.85X17	*	*
3.00-17	4PR 45P TT	3.1/80	23.7/602	364/165	32/2.25	1.85X17		*
3.00-17	6PR 50P TT	3.1/80	23.7/602	418/190	32/2.25	1.85X17	*	*
2.50-18	4PR 40P TT	2.6/65	23.3/593	309/140	33/2.3	1.60X18		*
2.50-18	6PR 45P TT	2.6/65	23.3/593	364/165	40/2.8	1.60X18		*
2.75-18	4PR 42P TT	3.0/75	24.1/613	331/150	32/2.25	1.85X18		*
2.75-18	6PR 48L TT	3.0/75	24.1/613	397/180	32/2.25	1.85X18	*	*
2.75-18	8PR 51P TT	3.0/75	24.1/613	430/195	44/3.1	1.85X18		*
3.50-18	4PR 56P TT/TL	3.7/93	25.6/649	494/224	33/2.3	2.15X18		*
3.50-18	6PR 62P TT/TL	3.7/93	25.6/649	584/265	40/2.8	2.15X18		*



SU-124

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-16	4PR 43P TT	3.1/80	22.7/576	342/155	33/2.3	1.85X16		*
3.00-16	6PR 49P TT	3.1/80	22.7/576	397/180	40/2.8	1.85X16		*
2.50-17	4PR 38P TT	2.6/65	22.4/568	291/132	32/2.25	1.60X17		*
2.50-17	6PR 43J TT	2.6/65	22.4/568	341/155	32/2.25	1.60X17	*	*
2.75-17	4PR 41P TT	3.0/75	23.1/588	320/145	32/2.25	1.85X17		*
2.75-17	6PR 47J TT	3.0/75	23.1/588	385/175	32/2.25	1.85X17	*	*
3.00-17	4PR 45P TT	3.1/80	23.7/602	364/165	32/2.25	1.85X17		*
3.00-17	6PR 50P TT	3.1/80	23.7/602	418/190	32/2.25	1.85X17	*	*
3.25-17	4PR 52P TT	3.5/89	24.2/614	419/190	33/2.3	2.15X17		*
3.25-17	6PR 58P TT	3.5/89	24.2/614	507/230	40/2.8	2.15X17		*
2.75-18	4PR 42P TT	3.0/75	24.1/613	331/150	32/2.25	1.85X18		*
2.75-18	6PR 48L TT	3.0/75	24.1/613	397/180	33/2.25	1.85X18	*	*
2.75-18	8PR 51P TT	3.0/75	24.1/613	430/195	44/3.1	1.85X18		*
3.00-18	4PR 47P TT	3.1/80	24.7/627	386/175	32/2.25	1.85X18		*
3.00-18	6PR 52L TT	3.1/80	24.7/627	440/200	32/2.25	1.85X18	*	*
3.00-18	8PR 55P TT	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*



STREET TYRES



SU-126

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.75-17	4PR 41P TT	3.0/75	23.1/588	320/145	33/2.3	1.85X17		*
2.75-17	6PR 47P TT	3.0/75	23.1/588	386/175	40/2.3	1.85X17		*



SU-136

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.75-18	4PR 42P TT/TL	3.0/75	24.1/613	331/150	32/2.25	1.85X18		*
2.75-18	6PR 48L TT/TL	3.0/75	24.1/613	397/180	32/2.25	1.85X18	*	*
3.00-17	4PR 55P TT/TL	3.1/80	23.7/602	364/165	32/2.25	1.85X17		*
3.00-17	6PR 50P TT/TL	3.1/80	23.7/602	418/190	32/2.25	1.85X17	*	*
3.00-18	4PR 47P TT/TL	3.1/80	24.7/627	386/175	32/2.25	1.85X18		*
3.00-18	6PR 52L TT/TL	3.1/80	24.7/627	440/200	32/2.25	1.85X18	*	*
3.00-18	8PR 55P TT/TL	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*



SU-140

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
110/70-17	54H TT/TL	4.3/110	23.1/586	467/212	40/2.8	3.00X17		*
120/60-17	55P TT/TL	4.8/122	23.6/576	481/218	33/2.3	3.50X17		*
100/90-19	4PR TT/TL	4.0/101	26.1/663	507/230	33/2.3	2.50X19		*
100/90-19	6PR TT/TL	4.0/101	26.1/663	600/272	40/2.8	2.50X19		*



SU-142

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
150/60-17	66P TL	5.9/151	24.1/612	661/300	40/2.8	4.27X17		*

STREET TYRES



SU-143

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
3.25-16	4PR 48P TT	3.5/89	23.1/588	397/180	33/2.3	2.15X16		*
3.25-16	6PR 55P TT	3.5/89	23.1/588	481/128	40/2.3	2.15X16		*



SU-177

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
2.75-18	4PR 48P TT	3.5/89	23.1/588	397/180	33/2.3	2.15X16		*
2.75-18	6PR 559 TT	3.5/89	23.1/588	481/218	40/2.8	2.15X16		*
3.00-17	4PR 47P TT	3.1/80	24.6/627	386/175	32/2.25	1.85X18		*
3.00-17	6PR 52L TT	3.1/80	24.6/627	440/200	32/2.25	1.85X18	*	*
3.00-18	8PR 55P TT	3.1/80	24.6/627	481/218	44/3.1	1.85X18		*



SU-178A

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-18	4PR 47P TT/TL	3.1/80	24.7/627	386/175	32/2.25	1.85X18		*
3.00-18	6PR 52L TT/TL	3.1/80	24.7/627	440/200	32/2.25	1.85X18	*	*
3.00-18	8PR 55P TT/TL	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*



SU-142

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-17	4PR 45P TT/TL	3.1/80	23.7/602	364/165	32/2.25	1.85X17		*
3.00-17	6PR 50P TT/TL	3.1/80	23.7/602	418/190	32/2.25	1.85X17	*	*



STREET TYRES



SU-180

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.50-17	4PR 38P TT	2.6/65	24.4/568	291/132	32/2.25	1.60X17		*
2.50-17	6PR 43J TT	2.6/65	24.4/568	341/155	32/2.25	1.60X17	*	*



SU-201

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.75-19	4PR 61P TT	4.0/99	27.0/687	567/257	33/2.3	2.15X19		*
3.75-19	6PR 66P TT	4.0/99	27.0/687	661/300	40/2.8	2.15X19		*



SU-178A

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
120/60-17	55P TT/TL	4.8/122	23.6/576	481/218	33/2.3	3.50X17		*



SU-296

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.50-17	4PR 38P TT	2.6/65	22.4/568	291/132	32/2.25	1.60X17		*
2.50-17	6PR 46J TT	2.6/65	22.4/568	341/155	32/2.25	1.60X17	*	*
2.50-17	8PR 45P TT	2.6/65	22.4/568	364/165	44/3.1	1.60X17		*



STREET TYRES



SU-297

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.25-17	4PR 33L TT	2.4/61	21.9/556	254/115	33/2.3	1.60X17		*
2.50-17	4PR 38P TT	2.6/65	22.4/568	291/132	32/2.25	1.60X17		*
2.50-17	6PR 43J TT	2.6/65	22.4/568	341/155	32/2.25	1.60X17	*	*
2.50-18	4PR 40P TT	2.6/65	23.3/593	309/140	33/2.3	1.60X18		*
2.50-18	6PR 45P TT	2.6/65	23.3/593	364/165	40/2.8	1.60X18		*
2.75-18	4PR 42P TT	3.0/75	24.1/613	331/150	32/2.25	1.85X18		*
2.75-18	6PR 48L TT	3.0/75	24.1/613	397/180	32/2.25	1.85X18	*	*
2.75-18	8PR 51P TT	3.0/75	24.1/613	430/195	44/3.1	1.85X18		*
3.00-18	4PR 47P TT	3.1/80	24.7/627	386/175	32/2.25	1.85X18		*
3.00-18	6PR 52L TT	3.1/80	24.7/627	440/200	32/2.25	1.85X18	*	*
3.00-18	8PR 55P TT	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*
3.50-18	4PR 56P TT/TL	3.7/93	25.6/649	494/224	33/2.3	2.15X18		*
3.50-18	6PR 62P TT/TL	3.7/93	25.6/649	584/265	40/2.8	2.15X18		*



SU-298

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.75-17	4PR 41P TT/TL	3.0/75	23.1/588	320/145	33/2.25	1.85X17		*
2.75-17	6PR 47J TT/TL	3.0/75	23.1/588	386/175	33/2.25	1.85X17	*	*
3.00-17	4PR 45P TT/TL	3.1/80	23.7/602	364/165	33/2.3	1.85X17		*
3.00-17	6PR 50P TT/TL	3.1/80	23.7/602	419/190	40/2.8	1.85X17	*	*
2.75-18	4PR 42P TT/TL	3.0/75	24.1/613	331/150	33/2.25	1.85X18		*
2.75-18	6PR 48P TT/TL	3.0/75	24.1/613	397/180	33/2.25	1.85X18	*	*
3.00-18	4PR 47P TT/TL	3.1/80	24.7/627	386/175	33/2.25	1.85X18		*
3.00-18	6PR 52L TT/TL	3.1/80	24.7/627	440/200	33/2.25	1.85X18	*	*
3.00-18	8PR 55P TT/TL	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*
3.25-18	4PR 52P TT/TL	3.5/89	25.2/639	441/200	33/2.3	2.15X18		*
3.25-18	6PR 59P TT/TL	3.5/89	25.2/639	535/243	40/2.3	2.15X18	*	*
100/90-18	4PR 56P TT/TL	4.0/101	25.1/637	494/224	33/2.3	2.50X18		*
100/90-18	6PR 62P TT/TL	4.0/101	25.1/637	584/265	40/2.8	2.50X18		*



STREET TYRES



SU-299

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
3.25-18	4PR 52P TT	3.5/89	25.2/639	441/200	33/2.3	2.15X18		*
3.25-18	6PR 59P TT	3.5/89	25.2/639	535/243	40/2.8	2.15X18	*	*



SU-301

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-16	4PR 52P TT	3.7/93	23.5/598	441/200	33/2.3	2.15X16		*
3.50-16	6PR 58P TT	3.7/93	23.5/598	520/236	40/2.8	2.15X16		*



SU-310

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
2.50-17	4PR 38P TT	2.6/65	22.4/568	291/132	32/2.5	1.60X17		*
2.50-17	6PR 43J TT	2.6/65	22.4/568	341/155	32/2.5	1.60X17	*	*
3.00-17	4PR 45P TT	3.1/80	23.7/602	364/165	32/2.5	1.60X17		*
3.00-17	6PR 50P TT	3.1/80	23.7/602	419/190	32/2.5	1.60X17	*	*



SU-311

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
80/100-14	4PR 43J TT	3.1/80	20.3/516	342/155	33/2.3	1.85X14		*
80/100-14	6PR 49L TT	3.1/80	20.3/516	407/185	33/2.3	1.85X14	*	*
3.00-18	4PR 47P TT	3.1/80	24.7/627	386/175	33/2.25	1.85X18		*
3.00-18	6PR 52L TT	3.1/80	24.7/627	440/200	33/2.25	1.85X18	*	*
3.00-18	8PR 55P TT	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*

STREET TYRES



SU-401

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
2.50-14	4PR 35P TT	2.6/65	19.4/492	247/112	33/2.3	1.60X14		*
2.50-14	6PR 37P TT	2.6/65	19.4/492	282/128	33/2.3	1.60X14		*
2.75-14	4PR 35P TT	3.0/75	20.2/512	267/121	33/2.3	1.85X14		*
2.75-14	6PR 41P TT	3.0/75	20.2/512	320/145	40/2.8	1.85X14		*
3.50-16	4PR 52P TT	3.7/93	23.5/598	441/200	33/2.3	2.15X16		*
3.50-16	6PR 58P TT	3.7/93	23.5/598	520/236	40/2.8	2.15X16		*
2.25-17	4PR 33L TT	2.4/61	21.9/556	254/115	33/2.3	1.60X17		*
2.50-17	4PR 38P TT	2.6/65	22.4/568	291/132	32/2.25	1.60X17		*
2.50-17	6PR 43J TT	2.6/65	22.4/568	341/155	32/2.25	1.60X17	*	*
2.50-17	8PR 45P TT	2.6/65	22.4/568	364/165	44/3.1	1.60X17		*
2.75-17	4PR 41P TT	3.0/75	23.1/588	320/145	32/2.25	1.85X17		*
2.75-17	6PR 47J TT	3.0/75	23.1/588	386/175	32/2.25	1.85X17	*	*
3.00-17	4PR 45P TT	3.1/80	23.7/602	364/165	32/2.25	1.85X17		*
3.00-17	6PR 50P TT	3.1/80	23.7/602	418/190	32/2.25	1.85X17	*	*
2.50-18	4PR 40P TT	2.6/65	23.3/593	309/140	33/2.3	1.60X18		*
2.50-18	6PR 45P TT	2.6/65	23.3/593	364/165	40/2.8	1.60X18		*
2.75-18	4PR 42P TT	3.0/75	24.1/613	331/150	32/2.25	1.85X18		*
2.75-18	6PR 48L TT	3.0/75	24.1/613	397/180	32/2.25	1.85X18	*	*
2.75-18	8PR 51P TT	3.0/75	24.1/613	430/195	44/3.1	1.85X18		*
3.00-18	4PR 47P TT	3.1/80	24.7/627	386/175	32/2.25	1.85X18		*
3.00-18	6PR 52L TT	3.1/80	24.7/627	440/200	32/2.25	1.85X18	*	*
3.00-18	8PR 55P TT	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*



SU-502

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
110/90-16	4PR 59P TT/TL	4.3/109	23.8/604	536/243	33/2.3	2.50X16		*
110/90-16	6PR 65P TT/TL	4.3/109	23.8/604	639/290	40/2.8	2.50X16		*



STREET TYRES



SU-601

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KG/CM ²	Rim (INCH)	E MARK	DOT
2.00-17	4PR 28B TT	2.2/56	21.4/544	220/110	33/2.3	1.40X17		*
2.25-17	4PR 33L TT	2.4/61	21.9/556	254/115	33/2.3	1.60X17		*
2.50-17	4PR 38P TT	2.6/65	22.4/568	291/132	32/2.25	1.60X17		*
2.50-17	6PR 43J TT	2.6/65	22.4/568	341/155	32/2.25	1.60X17	*	*
2.50-17	8PR 45P TT	2.6/65	22.4/568	364/165	44/3.1	1.60X17		*
60/70-17	4PR TT	2.3/60	20.4/517	204/92.5	33/2.3	1.40X17		*
60/80-17	4PR TT	2.3/60	20.8/528	217/97.5	33/2.3	1.40X17		*
60/80-17	6PR TT	2.3/60	20.8/528	254/115	40/2.8	1.40X17		*
60/90-17	4PR TT	2.4/61	21.2/540	235/106	33/2.3	1.50X17		*
60/90-17	6PR TT	2.4/61	21.2/540	275/125	40/2.8	1.50X17		*
77/70-17	4PR TT	2.7/69	20.9/531	254/115	33/2.3	1.60X17		*
70/80-17	4PR 35P TT	2.7/69	21.4/544	267/121	33/2.3	1.60X17		*
70/80-17	6PR 41P TT	2.7/69	21.4/544	320/145	40/2.8	1.60X17		*
80/80-17	4PR 41P TT	3.1/80	22.1/560	320/145	33/2.3	1.85X17		*
80/80-17	6PR 47P TT	3.1/80	22.1/560	386/175	40/2.8	1.85X17		*
80/90-17	4PR 44P TT/TL	3.1/80	22.7/576	353/160	33/2.3	1.85X17		*
80/90-17	6PR 50P TT/TL	3.1/80	22.7/576	419/190	40/2.8	1.85X17		*
90/80-17	4PR 46S TT/TL	3.5/90	22.7/576	375/170	33/2.3	2.15X17		*
90/80-17	4PR 46S TT/TL	3.5/90	22.7/576	375/170	33/2.3	2.15X17		*
100/80-17	4PR 52L TT/TL	4.0/101	23.5/592	441/200	35/2.5	2.50X17	*	*
100/80-17	6PR 58P TT/TL	4.0/101	23.5/592	520/236	40/2.8	2.50X17		*
120/80-16	4PR 60P TT/TL	4.3/119	23.5/598	551/250	33/2.3	2.75X16		*
120/80-16	6PR 66P TT/TL	4.13/119	23.5/598	661/300	40/2.8	2.75X16		*
2.25-18	4PR 35L TT	2.4/61	22.9/581	267/121	33/2.3	1.60X18		*
2.25-18	6PR 40L TT	2.4/61	22.9/581	309/140	40/2.8	1.60X18		*



SU-602

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KG/CM ²	Rim (INCH)	E MARK	DOT
2.25-17	4PR 33L TT	2.4/61	21.9/556	254/115	33/2.3	1.60X17		*
2.50-17	4PR 38P TT	2.6/65	22.4/568	291/132	33/2.25	1.60X17		*
2.50-17	6PR 43J TT	2.6/65	22.4/568	341/155	33/2.25	1.60X17	*	*
2.50-17	8PR 45P TT	2.6/65	22.4/568	364/165	44/3.1	1.60X17		*
2.50-18	4PR 40P TT	2.6/65	23.3/593	309/104	33/2.3	1.60X18		*
2.50-18	6PR 45P TT	2.6/65	23.3/593	364/165	40/2.8	1.60X18		*



STREET TYRES



SU-603-2

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.50-17	4PR 38P TT	2.6/65	22.4/568	291/132	33/2.25	1.60X17		*
2.50-17	6PR 43J TT	2.6/65	22.4/568	341/155	33/2.25	1.60X17	*	*



SU-612

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.50-17	4PR 38P TT	2.6/65	22.4/568	291/132	32/2.25	1.60X17		*
2.50-17	6PR 43J TT	2.6/65	22.4/568	341/155	32/2.25	1.60X17	*	*
2.50-17	8PR 45P TT	2.6/65	22.4/568	364/165	44/3.1	1.60X17		*
2.75-17	4PR 41P TT	3.0/75	23.1/588	320/145	32/2.25	1.85X17		*
2.75-17	6PR 47J TT	3.0/75	23.1/588	386/175	32/2.25	1.85X17	*	*
3.00-18	4PR 47P TT	3.1/80	24.7/627	386/175	32/2.25	1.85X18		*
3.00-18	6PR 52L TT	3.1/80	24.7/627	440/200	32/2.25	1.85X18	*	*
3.00-18	8PR 55P TT	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*



SU-621

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
70/90-17	4PR 38P TT/TL	2.7/69	22/558	291/132	33/2.3	1.60X17		*
70/90-17	6PR 44P TT/TL	2.7/69	22/558	342/155	40/2.8	1.60X17		*



SU-629

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-18	4PR 56P TT/TL	3.7/93	25.6/649	494/224	33/2.3	2.15X18		*
3.50-18	6PR 62P TT/TL	3.7/93	25.6/649	584/265	40/2.8	2.15X18		*



STREET TYRES



SU-633

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-18	4PR 47P TT/TL	3.1/80	24.7/627	386/175	33/2.25	1.85X18		*
3.00-18	6PR 52P TT/TL	3.1/80	24.7/627	441/200	33/2.25	1.85X18	*	*
3.00-18	8PR 55P TT/TL	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*



SU-646

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-17	4PR 54P TT/TL	3.7/93	24.6/624	567/212	33/2.3	2.15X17		*
3.50-17	6PR 60P TT/TL	3.7/93	24.6/624	551/250	40/2.8	2.15X17		*



SU-651

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
130/90-15	4PR 66P TT/TL	5.1/129	24.2/615	661/300	33/2.3	1.60X17		*
130/90-15	6PR 72P TT/TL	5.1/129	24.2/612	783/355	40/2.8	1.60X17		*



SU-680

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
3.25-18	4PR 52P TT/TL	3.5/89	25.2/639	441/200	33/2.3	2.15X18		*
3.25-18	6PR 59P TT/TL	3.5/89	25.2/639	535/243	40/2.8	2.15X18	*	*



STREET TYRES



SU-693

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-18	4PR 47P TT/TL	3.1/80	24.7/627	386/175	33/2.25	1.85X18		*
3.00-18	6PR 52P TT/TL	3.1/80	24.7/627	441/200	33/2.25	1.85X18	*	*
3.00-18	8PR 55P TT/TL	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*



SU-694

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-18	4PR 47P TT/TL	3.1/80	24.7/627	386/175	33/2.25	1.85X18		*
3.00-18	6PR 52P TT/TL	3.1/80	24.7/627	441/200	33/2.25	1.85X18	*	*
3.00-18	8PR 55P TT/TL	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*



SU-695

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-17	4PR 55P TT	3.1/80	23.7/602	364/165	33/2.3	1.85X17		*
3.00-17	6PR 50P TT	3.1/80	23.7/602	419/190	40/2.8	1.85X17		*



SU-697

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.75-18	4PR 42P TT	3.0/75	24.1/613	331/150	33/2.25	1.85X18		*
2.75-18	6PR 48P TT	3.0/75	24.1/613	397/180	33/2.25	1.85X18	*	*
3.00-18	4PR 47P TT	3.1/80	24.7/627	386/175	33/2.25	1.85X18		*
3.00-18	6PR 52L TT	3.1/80	24.7/627	440/200	33/2.25	1.85X18	*	*
3.00-18	8PR 55P TT	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*



STREET TYRES



SU-698

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KG/CM ²	Rim (INCH)	E MARK	DOT
110/80-16	4PR 45P TT/TL	4.3/109	22.9/582	481/218	33/2.3	2.50X16		*
110/80-16	6PR 61P TT/TL	4.3/109	22.9/582	568/528	40/2.8	2.50X16		*
100/90-17	8PR 55P TT/TL	4.0/101	24.1/612	481/218	33/2.3	2.50X17		*
100/90-17	6PR 61P TT/TL	4.0/101	24.6/612	567/257	40/2.8	2.50X17		*
100/90-18	4PR 56P TT/TL	4.0/101	25.1/637	494/224	33/2.3	2.50X18		*
100/90-18	6PR 62P TT/TL	4.0/101	25.1/637	584/265	40/2.8	2.50X18		*
3.25-18	4PR 52P TT/TL	3.5/89	25.2/639	441/200	33/2.3	2.15X18		*
3.25-18	6PR 59P TT/TL	3.5/89	25.2/639	535/243	40/2.8	2.15X18	*	*



SU-703

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KG/CM ²	Rim (INCH)	E MARK	DOT
2.50-17	4PR 38P TT	2.6/65	22.4/568	291/132	32/2.25	1.60X17		*
2.50-17	6PR 43J TT	2.6/65	22.4/568	341/155	32/2.25	1.60X17	*	*
2.75-17	4PR 41P TT	3.0/75	23.1/588	320/145	32/2.25	1.85X17		*
2.75-17	6PR 47J TT	3.0/75	23.5/588	386/175	32/2.25	1.85X17	*	*
3.00-17	4PR 45P TT	3.1/80	23.7/602	364/165	32/2.25	1.85X17		*
3.00-17	6PR 50P TT	3.1/80	23.7/602	418/190	32/2.25	1.85X17	*	*
70/90-17	4PR 38P TT/TL	2.7/69	22/558	291/132	33/2.3	1.60X17		*
70/90-17	6PR 44P TT/TL	2.7/69	22/558	342/155	33/2.3	1.60X17		*
80/90-17	4PR 44P TT/TL	3.1/80	22.7/576	353/160	33/2.3	1.85X17		*
80/90-17	6PR 50P TT/TL	3.1/80	22.7/576	419/190	40/2.8	1.85X17		*
360H18	6PR 57P TT/TL	3.5/90	24.4/619	507/230	40/2.8	2.15X18		*
360H18	8PR 63P TT/TL	3.5/90	24.4/619	600/272	43/3.0	2.15X18		*
99/90-18	4PR 51P TT	3.5/90	24.4/619	430/195	32/2.25	2.15X18		*
90/90-18	6PR 57P TT	3.5/90	24.4/619	507/230	32/2.25	2.15X18		*



SU-704

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KG/CM ²	Rim (INCH)	E MARK	DOT
120/90-16	63H TT/TL	4.7/119	24.5/622	600/272	40/2.8	2.75X16		*
120/90-17	64H TT/TL	4.7/119	25.5/648	617/280	40/2.8	2.75X17		*



STREET TYRES



SU-705

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
90/100-18	54P TT/TL	3.5/90	25.1/637	467/212	33/2.3	2.15X18		*



SU-706

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
110/90-17	4PR TT/TL	4.3/109	24.8/630	551/250	33/2.3	2.50X17		*
110/90-17	6PR TT/TL	4.3/109	24.8/630	661/300	40/2.8	2.50X17		*
4.00-18	4PR TT	4.1/104	26.4/671	617/280	33/2.3	2.15X18		*
4.00-18	4PR TT	4.1/104	26.4/671	716/325	40/2.8	2.15X18		*
90/90-19	4PR TT/TL	3.5/90	25.4/645	441/200	33/2.3	2.15X17		*
90/90-19	6PR TT/TL	3.5/90	25.4/645	520/236	40/2.8	2.15X17		*
4.00-19	4PR TT	4.5/114	27.4/695	639/290	33/2.3	2.15X19		*
4.00-19	6PR TT	4.5/114	27.4/695	639/290	33/2.3	2.15X19		*



SU-710

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.25-16	4PR 31L TT	2.4/61	20.9/532	239/109	33/2.3	1.60X16	*	*



SU-713

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.75-19	4PR 61P TT	4.0/99	27.0/687	567/257	33/2.25	2.15X19		*
3.75-19	6PR 66P TT	4.0/99	27.0/687	661/300	40/2.8	2.15X19		*



STREET TYRES



SU-714

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2 1/2-9	4PR 36J TT	2.6/65	14.3/364	233/106	36/2.50	1.50X9		*



SU-715

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.25-19	4PR 37P TT	2.4/61	23.9/607	282/128	33/2.3	1.60X19		*



SU-721

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.25-18	4PR 52P TT/TL	3.5/89	25.2/639	421/200	33/2.3	2.15X18		*
3.25-18	6PR 59P TT/TL	3.5/89	25.2/639	535/243	40/2.8	2.15X18		*



SU-727

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
90/90-19	4PR 61P TT/TL	3.5/90	24.4/619	430/195	33/2.25	2.15X18		*
90/90-18	6PR 57P TT/TL	3.5/90	24.4/619	507/230	33/2.25	2.15X18	*	*



STREET TYRES



SU-728

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
110/80-17	4PR 57P TT/TL	4.3/109	23.9/608	507/230	33/2.3	2.50X17		*



SU-729

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.50-18	4PR 56P TT/TL	3.7/93	25.6/649	494/224	33/2.3	2.15X18		*
3.50-18	6PR 62P TT/TL	3.7/93	25.6/649	584/265	40/2.8	2.15X18		*
90/90-18	4PR 51P TT/TL	3.5/90	24.4/619	430/195	33/2.3	2.15X18		*
90/90-18	6PR 57P TT/TL	3.5/90	24.4/619	507/230	40/2.8	2.15X18	*	*
80/100-18	4PR 47P TT/TL	3.1/80	24.3/617	386/175	33/2.3	1.85X18		*



SU-801

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
60/80-17	4PR TT	2.3/60	20.8/528	217/97.5	33/2.3	1.40X17		*
60/80-17	6PR TT	2.3/60	20.8/528	254/115	40/2.8	1.40X17		*
60/90-17	4PR TT	2.4/61	21.2/540	235/106	33/2.3	1.50X17		*
60/90-17	6PR TT	2.4/61	21.2/540	275/125	40/2.8	1.50X17		*
70/80-17	4PR 35P TT	2.7/69	21.4/544	267/121	33/2.3	1.60X17		*
70/80-17	6PR 41P TT	2.7/69	21.4/544	320/145	40/2.8	1.60X17		*
70/90-17	4PR 38P TT/TL	2.7/69	22/558	291/132	33/2.3	1.60X17		*
70/90-17	6PR 44P TT/TL	2.7/69	22/588	342/155	40/2.8	1.60X17		*
80/90-17	4PR 44P TT/TL	3.1/80	22.7/576	353/160	33/2.3	1.85X17		*
80/90-17	6PR 50P TT/TL	3.1/80	22.7/576	419/190	40/2.8	1.85X17		*
90/80-17	4PR 46S TT/TL	3.5/90	22.7/576	375/170	33/2.3	2.15X17		*
90/80-17	4PR 46S TT/TL	3.5/90	22.7/576	375/170	33/2.3	2.15X17		*
100/80-17	4PR 52L TT/TL	4.0/101	23.3/592	441/200	35/2.5	2.50X17	*	*
100/80-17	6PR 58P TT/TL	4.0/101	23.3/592	520/236	40/2.8	2.50X17		*



STREET TYRES



SU-801-2

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KG/CM ²	Rim (INCH)	E MARK	DOT
80/100-14	4PR 43J TT	3.1/80	20.3/516	342/155	33/2.3	1.85X14		*
80/100-14	6PR 49L TT	3.1/80	20.3/516	407/185	33/2.3	1.85X14	*	*



SU-802

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KG/CM ²	Rim (INCH)	E MARK	DOT
90/80-17	4PR 46S TT/TL	3.5/90	22.7/576	375/170	33/2.3	2.15X17		*
90/80-17	4PR 46S TT/TL	3.5/90	22.7/576	375/170	33/2.3	2.15X17		*
110/80-17	4PR 57P TT/TL	4.3/109	23.9/608	507/230	33/2.3	2.50X17		*
120/80-17	4PR 61S TT/TL	4.7/119	24.6/624	567/257	36/2.5	2.75X17		*
120/80-17	6PR 67H TT/TL	4.7/119	24.6/624	677/307	40/2.8	2.75X17		*
130/70-17	4PR 62L TT/TL	5.5/139	24.7/628	661/300	32/2.25	3.50X17	*	*
90/90-19	4PR TT/TL	3.5/90	25.4/645	441/200	33/2.3	2.15X17		*
90/90-19	6PR TT/TL	3.5/90	25.4/645	520/236	40/2.8	2.15X17		*
80/100-19	6PR 49P TT/TL	3.1/80	25.3/643	408/185	33/2.3	1.85X19		*
80/100-19	6PR 55P TT/TL	3.1/80	25.3/643	481/218	40/2.8	1.85X19		*
90/90-21	4PR 54P TT/TL	3.5/90	27.4/695	467/512	33/2.3	2.15X21		*
100/90-21	4PR 59P TT/TL	4.0/101	28.1/713	536/243	33/2.3	2.50X21		*
100/90-21	6PR 65P TT/TL	4.0/101	28.1/713	639/290	40/2.8	2.50X21		*
100/80-17	4PR 52L TT/TL	4.0/101	23.3/592	441/200	35/2.5	2.50X17		*
100/80-17	6PR 58P TT/TL	4.0/101	23.3/592	520/236	40/2.8	2.50X17		*



SU-803

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KG/CM ²	Rim (INCH)	E MARK	DOT
70/90-17	4PR 38T TT/TL	2.7/69	22/558	291/132	33/2.3	1.60X17		*
70/90-17	6PR 44P TT/TL	2.7/69	22/558	342/155	40/2.8	1.60X17		*
80/90-17	4PR 44P TT/TL	3.1/80	22.7/576	353/160	33/2.3	1.85X17		*
80/90-17	6PR 50P TT/TL	3.1/80	22.7/576	419/190	40/2.8	1.85X17		*
90/80-17	4PR 46S TT/TL	3.5/90	22.7/576	375/170	33/2.3	2.15X17		*
90/90-17	4PR 50P TT/TL	3.5/90	23.4/594	419/190	33/2.3	2.15X17		*
90/90-18	4PR 51P TT	3.5/90	24.4/619	430/195	32/2.25	2.15X18		*
90/90-18	6PR 57P TT	3.5/90	24.4/619	507/230	32/2.25	2.15X18	*	*



STREET TYRES



SU-803B

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
100/80-17	4PR 52L TT/TL	4.0/101	23.3/592	441/200	33/2.3	2.50X17	*	*
100/80-17	6PR 58P TT/TL	4.0/101	23.3/592	520/236	40/2.8	2.50X17		*
110/70-17	54H TT/TL	4.3/110	23.1/586	467/212	40/2.8	3.00X17		*
120/80-17	4PR 61S TT/TL	4.7/119	24.6/624	567/257	36/2.5	2.75X17		*
120/80-17	6PR 67H TT/TL	4.7/119	24.6/624	677/307	40/2.8	2.75X17		*
130/70-17	4PR 62L TT/TL	5.5/139	24.7/628	661/300	32/22.5	3.50X17	*	*
140/60-17	63H TT/TL	5.5/139	23.6/600	600/272	40/2.8	3.75X17		*



SU-901

		S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	
60/80-17	4PR TT	2.3/60	20.8/528	217/97.5	33/2.3	1.40X17		*
60/80-17	6PR TT	2.3/60	20.8/528	254/115	44/2.8	1.40X17		*
50/90-17	4PR TT	2.0/50	20.6/522	217/97.5	33/2.3	1.20X17		*
50/90-17	6PR TT	2.0/50	20.6/522	254/115	44/2.8	1.20X17		*
50/80-18	TPR TT	2.0/50	21.1/537	227/103	33/2.3	1.20X18		*
50/80-18	6PR TT	2.0/50	21.1/537	267/121	44/2.8	1.20X18		*
50/70-18	TPR TT	2.0/50	20.7/527	220/100	33/2.3	1.20X18		*
50/70-18	6PR TT	2.0/50	20.7/527	248/118	44/2.8	1.20X18		*
70/70-17	TPR TT	2.7/69	20.9/530	248/118	33/2.3	1.60X17		*
70/70-17	6PR TT	2.7/69	20.9/530	309/140	44/2.8	1.60X17		*



SU-902

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.75-18	4PR 42P TT	3.0/75	24.1/613	331/150	33/2.3	1.85X18		*
2.75-18	6PR 48P TT	3.0/75	24.1/613	397/180	40/2.8	1.85X18	*	*



SU-903

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
90/80-14	4PR 43P TT/TL	3.5/90	19.7/500	342/155	33/2.3	2.15X14		*
90/80-14	6PR 49P TT/TL	3.5/90	19.7/500	408/185	40/2.8	2.15X14		*
100/70-14	4PR 44P TT/TL	3.9/100	19.5/496	353/160	33/2.3	2.15X14		*
100/70-14	6PR 50P TT/TL	3.9/100	19.5/496	419/190	40/2.8	2.15X14		*
120/70-14	4PR 55P TT/TL	4.8/122	20.3/524	481/218	33/2.3	3.50X14		*
120/70-14	6PR 61P TT/TL	4.8/122	20.3/524	567/257	40/2.8	3.50X14		*



STREET TYRES



SU-905

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
90/80-14	4PR 43P TT/TL	3.5/90	19.7/500	342/155	33/2.3	2.15X14		*
90/80-14	6PR 49P TT/TL	3.5/90	19.7/500	407/185	40/2.8	2.15X14		*
100/70-14	4PR 44P TT/TL	3.9/100	19.5/496	353/160	33/2.3	2.15X14		*
100/70-14	6PR 50P TT/TL	3.9/100	19.5/496	419/190	40/2.8	2.15X17		*
120/70-14	4PR 55P TT/TL	4.8/122	20.3/524	481/218	33/2.3	3.50X14		*
120/70-14	6PR 61P TT/TL	4.8/122	20.3/524	567/257	40/2.8	3.50X14		*
140/70-14	4PR 62P TT/TL	5.5/139	21.7/552	584/265	33/2.3	3.75X14		*
140/70-14	4PR 68P TT/TL	5.5/139	21.7/552	694/315	40/2.8	3.75X14		*
100/70-17	4PR 49P TT/TL	3.9/100	22.5/572	407/185	33/2.3	2.75X17		*
100/70-17	4PR 55P TT/TL	3.9/100	22.5/572	451/223	40/2.8	2.75X17		*
120/70-17	4PR 58P TT/TL	4.8/122	236/600	520/236	33/2.3	3.50X17		*
120/70-17	6PR 63P TT/TL	4.8/122	236/600	603/274	40/2.8	3.50X17		*
130/70-17	4PR 62L TT/TL	5.5/139	236/600	661/300	33/22.5	3.50X17	*	*
130/70-17	62H TT/TL	5.5/139	24.7/628	661/300	40/2.8	3.50X17		*
140/70-17	4PR 66P TT/TL	5.5/139	24.7/628	661/300	33/2.3	3.75X17		*
140/70-17	6PR 72P TT/TL	5.5/139	24.7/628	739/335	40/2.8	3.75X17		*
150/70-17	4PR 69P TT/TL	6.0/151	25.3/642	716/325	30/2.3	4.25X17		*
150/70-17	6PR 75P TT/TL	6.0/151	25.3/642	783/355	40/2.8	4.25X17		*



SU-907

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.25-16	4PR 31L TT	2.4/61	20.9/532	239/109	32/2.25	1.60X16	*	*
2.50-17	4PR 38P TT	2.6/65	22.4/568	291/132	32/2.25	1.60X17		*
2.50-17	6PR 43J TT	2.6/65	22.4/568	341/155	32/2.25	1.60X17	*	*
2.50-17	8PR 45P TT	2.6/65	22.4/568	364/165	44/3.1	1.60X17		*
2.50-18	4PR 40P TT	2.6/65	23.3/593	309/140	33/2.3	1.60X18		*
2.50-18	6PR 45P TT	2.6/65	23.3/593	364/165	40/2.8	1.60X18		*



SU-917

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00/3.25-18	4PR 52P TT	3.5/89	25.2/639	441/200	33/2.3	2.15X18		*
3.00/3.25-18	6PR 59P TT	3.5/89	25.2/639	353/243	40/2.8	2.15X18		*



SUNIK INTERNATIONAL PVT. LTD.
www.suniktires.com

STREET TYRES



SU-908

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
90/80-18	4PR 47P TT/TL	3.5/90	23.6/601	386/175	33/2.3	2.15X18		*
90/80-18	6PR 57P TT/TL	3.5/90	23.6/601	467/212	40/2.8	2.15X18		*
100/80-18	4PR 53P TT/TL	4.0/101	24.3/617	454/206	33/2.3	2.50X18		*
100/80-18	6PR 59P TT/TL	4.0/101	24.3/617	536/243	40/2.8	2.50X18		*
110/80-18	4PR 58H TT/TL	4.3/109	24.9/633	520/236	33/2.3	2.50X18		*
120/80-18	4PR 62H TT/TL	4.7/119	25.6/649	584/265	33/2.3	275X18		*



SU-1001

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I/KGF/CM ²	Rim (INCH)	E MARK	DOT
90/90-17	4PR 50P TT/TL	3.5/90	23.4/594	419/190	33/2.3	2.15X17		*
110/80-17	4PR 57P TT/TL	4.3/109	23.9/608	507/230	33/2.3	2.50X17		*
110/80-17	6PR 57H TT/TL	4.3/109	23.9/608	507/230	40/2.8	2.50X17		*
110/90-17	4PR TT/TL	4.3/109	24.8/630	551/250	33/2.3	2.50X17		*
110/90-17	6PR TT/TL	4.3/109	24.8/630	661/300	40/2.8	2.50X17		*
120/90-17	6PR 64H TT/TL	4.7/119	25.5/648	617/280	40/2.8	2.75X17		*
110/90-18	61H TT/TL	4.3/109	25.8/655	567/257	40/2.8	2.50X18		*
130/90-18	6PR 69H TT/TL	5.1/129	27.2/691	716/325	40/2.8	3.00X18		*



OFF-ROAD TYRES



SU-0008

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.25-17	4PR 52L TT	3.5/89	24.2/614	419/190	33/2.3	2.15X17		*
3.25-17	6PR 58P TT	3.5/89	24.2/614	507/230	40/2.8	2.15X17		*
4.60-17	4PR 61P TT	4.5/114	24.9/632	567/257	33/2.3	2.15X17		*
4.60-17	4PR 66P TT	4.5/114	24.9/632	661/300	40/2.8	2.15X17		*
5.10-17	6PR 71P TT	5.4/137	25.9/658	761/345	40/2.8	3.00X17		*
5.50-18	4PR 56P TT/TL	3.7/93	25.6/649	494/224	33/2.3	2.15X18		*
3.50-18	6PR 62P TT/TL	3.7/90	25.6/649	854/265	40/2.8	2.15X18		*
4.00-18	4PR 60P TT	4.1/104	26.4/671	617/280	33/2.3	2.15X18		*
4.00-18	4PR 69P TT	4.1/104	26.4/671	716/325	40/2.8	2.15X18		*
4.50-18	6PR 73P TT	4.1/111	27.2/691	805/365	40/2.8	2.15X18		*
5.10-18	6PR 73P TT	5.2/132	27.0/686	805/365	40/2.8	3.00X18		*
100/90-18	4PR 56P TT/TL	4.0/101	25.1/637	494/224	33/2.3	2.50X18		*
100/90-18	6PR 62P TT/TL	4.0/101	25.1/637	584/265	40/2.8	2.50X18		*
120/80-18	4PR 62P TT/TL	4.7/119	25.6/649	584/265	33/2.3	2.75X18		*
120/80-18	6PR 68P TT/TL	4.7/119	25.6/649	694/315	40/2.8	2.75X18		*
4.10-18	4PR 58P TT	4.1/104	25.2/639	520/236	33/2.3	2.15X18	*	*
4.10-18	6PR 63P TT	4.1/104	25.2/639	600/272	40/2.8	2.15X18		*
2.75-19	4PR 43P TT	3.0/75	25.2/639	342/155	33/2.3	1.85X19		*
2.50-21	4PR 43P TT	2.6/65	26.3/669	342/155	33/2.3	1.60X21		*
2.75-21	6PR 52P TT	3.0/75	27.1/689	441/200	40/2.8	1.85X21		*
3.00-21	4PR 51P TT	3.1/80	27.7/703	430/195	33/2.3	1.85X21		*
3.00-21	6PR 57L TT	3.1/80	27.7/703	506/230	40/2.8	1.85X21	*	*
3.25-21	4PR 57P TT	3.5/89	28.1/715	507/230	33/2.3	2.15X21		*
90/90-21	4PR 54P TT/TL	3.5/90	27.4/695	467/212	33/2.3	2.15X21		*



SU-040

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
110/90-16	4PR 59P TT/TL	4.3/109	23.8/604	536/243	33/2.3	2.50X16		*
110/90-16	6PR 65P TT/TL	4.3/109	23.8/604	639/290	40/2.8	2.50X16		*
120/90-16	62H TT/TL	4.7/119	24.5/622	600/272	40/2.8	2.75X16		*

OFF-ROAD TYRES



SU-131-1

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.75-14	4PR 35P TT/TL	3.0/75	20.2/512	267/121	33/2.3	1.85X14		*
2.75-14	6PR 41P TT/TL	3.0/75	20.2/512	320/145	40/2.8	1.85X14		*
2.50-17	4PR 38P TT/TL	2.6/65	22.4/568	291/132	32/2.25	1.60X17		*
2.50-17	6PR 43J TT/TL	2.6/65	22.4/568	341/155	32/2.25	1.60X17	*	*
2.50-17	8PR 45P TT/TL	2.6/65	22.4/568	364/165	44/3.1	1.60X17		*
2.75-17	4PR 41P TT/TL	3.0/75	23.1/588	320/145	32/2.25	1.85X17		*
2.75-17	6PR 47J TT/TL	3.0/75	23.1/588	385/175	32/2.25	1.85X17	*	*
3.00-17	4PR 45P TT/TL	3.1/80	23.7/602	364/165	32/2.25	1.85X17		*
3.00-17	6PR 50P TT/TL	3.1/80	23.7/602	418/190	32/2.25	1.85X17	*	*
2.75-18	4PR 42P TT/TL	3.0/75	24.1/613	331/150	32/2.25	1.85X18		*
2.75-18	6PR 48L TT/TL	3.0/75	24.1/613	396/180	32/2.25	1.85X18	*	*
2.75-18	8PR 51P TT/TL	3.0/75	24.1/613	430/195	44/3.1	1.85X18		*
3.00-18	4PR 47P TT/TL	3.1/80	24.7/627	386/175	32/2.25	1.85X18		*
3.00-18	6PR 52L TT/TL	3.1/80	24.7/627	440/200	32/2.25	1.85X18	*	*
3.00-18	8PR 55P TT/TL	3.1/80	24.1/627	481/218	44/3.1	1.85X18		*
3.25-18	4PR 52P TT/TL	3.5/89	25.2/639	441/200	33/2.3	2.15X18		*
3.25-18	6PR 59P TT/TL	3.5/89	25.2/639	536/243	40/2.8	2.15X18	*	*
90/90-18	4PR 51P TT/TL	3.5/90	24.4/619	430/195	32/2.25	2.15X18		*
90/90-18	4PR 57P TT/TL	3.5/90	24.4/619	507/230	32/2.25	2.15X18	*	*



SU-131-2

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
130/90-15	4PR 66P TT/TL	5.1/129	24.2/615	661/300	33/2.3	3.00X15		*
130/90-15	6PR 72P TT/TL	5.1/129	24.2/615	783/355	40/2.8	3.00X15		*
110/90-16	4PR 59P TT/TL	4.3/109	23.8/604	536/243	33/2.3	2.50X16		*
110/90-16	6PR 65P TT/TL	4.3/109	23.8/604	639/290	40/2.8	2.50X16		*



SU-145

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.10-18	4PR 58P TT	4.1/104	25.2/639	535/243	32/2.25	2.50X18	*	*
4.10-18	6PR 63P TT	4.1/104	25.2/639	600/272	40/2.8	2.50X18		*
4.60-18	4PR 63P TT	4.4/111	25.7/654	598/272	33/2.3	2.75X18	*	*
4.60-18	6PR 68P TT	4.4/111	25.7/654	694/315	40/2.8	2.75X18		*
2.75-21	4PR 45P TT	3.0/75	27.1/689	364/165	33/2.3	1.85X21		*
2.75-21	6PR 52P TT	3.0/75	27.1/689	441/200	40/2.8	1.85X21		*
3.00-21	4PR 51P TT	3.1/80	27.7/703	430/195	33/2.3	1.85X21		*
3.00-21	6PR 57L TT	3.1/80	27.7/703	506/230	40/2.8	1.85X21	*	*

OFF-ROAD TYRES



SU-203

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.60-17	4PR 61P TT	4.5/114	24.9/632	567/257	33/2.3	2.15X17		*
4.60/17	4PR 66P TT	4.5/114	24.9/632	661/300	40/2.8	2.15X17		*
5.10-17	6PR 71P TT	5.4/137	25.9/658	761/345	40/2.8	3.00X17		*
4.10-18	4PR 58P TT	4.1/104	25.2/639	535/243	32/2.25	2.50X18	*	*
4.10-18	6PR 63P TT	4.1/104	25.2/639	600/272	40/2.8	2.50X18		*
4.60-18	4PR 63P TT	4.4/111	25.7/654	598/272	33/2.3	2.75X18	*	*
4.60-18	6PR 68P TT	4.4/111	25.7/654	694/315	40/2.8	2.75X18		*
3.00-21	4PR 51P TT	3.1/180	27.7/703	430/195	33/2.3	1.85X21		*
3.00-21	6PR 57L TT	3.1/180	27.7/703	506/230	40/2.8	1.85X21	*	*



SU-303

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.50-16	4PR 36B TT	2.6/65	21.3/542	276/125	33/2.3	1.60X16		*
2.50-16	6PR 41M TT	2.6/65	21.3/542	320/145	40/2.8	1.60X16		*
3.00-17	4PR 45P TT	3.1/80	23.7/602	364/165	32/2.25	1.85X17		*
3.00-17	6PR 50P TT	3.1/80	23.7/602	419/190	32/2.25	1.85X17	*	*
3.00-18	4PR 47P TT	3.1/80	24.7/627	386/175	32/2.25	1.85X18		*
3.00-18	6PR 52L TT	3.1/80	24.7/627	440/200	32/2.25	1.85X18	*	*
3.00-18	8PR 55P TT	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*



SU-333

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-17	4PR 45P TT	3.1/80	23.7/602	364/165	32/2.25	1.85X17		*
3.00-17	6PR 50P TT	3.1/80	23.7/602	419/190	32/2.25	1.85X17	*	*
3.00-18	4PR 47P TT	3.1/80	24.7/627	386/175	32/2.25	1.85X18		*
3.00-18	6PR 52L TT	3.1/80	24.7/627	440/200	32/2.25	1.85X18	*	*
3.00-18	8PR 55P TT	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*



SU-337

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-18	4PR 47P TT	3.1/80	24.7/627	386/175	32/2.25	1.85X18		*
3.00-18	6PR 52L TT	3.1/80	24.7/627	440/200	32/2.25	1.85X18	*	*
3.00-18	8PR 55P TT/TL	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*

OFF-ROAD TYRES



SU-403

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.75-16	4PR 40P TT	3.0/75	22.1/562	309/140	33/2.3	1.85X16		*
2.75-16	4PR 46P TT	3.0/75	22.1/562	375/170	40/2.8	1.85X16		*
3.50-16	4PR 52P TT	3.7/93	23.5/598	441/200	33/2.3	2.15X16		*
3.50-16	6PR 58P TT	3.7/93	23.5/598	520/236	40/2.8	2.15X16		*
2.50-17	4PR 38P TT	2.6/65	22.4/568	291/132	32/2.25	1.60X17		*
2.50-17	6PR 63J TT	2.6/65	22.4/568	341/155	32/2.25	1.60X17	*	*
2.75-17	4PR 41P TT	3.0/75	23.1/588	320/145	32/2.25	1.85X17		*
2.75-17	6PR 47J TT	3.0/75	23.1/588	385/175	32/2.25	1.85X17	*	*
3.00-17	4PR 45P TT	3.1/80	23.7/602	364/165	32/2.25	1.85X17		*
3.00-17	6PR 50P TT	3.1/80	23.7/602	418/190	32/2.25	1.85X17	*	*
2.75-18	4PR 42P TT	3.0/75	24.1/613	331/150	32/2.25	1.85X18		*
2.75-18	6PR 48L TT	3.0/75	24.1/613	396/180	32/2.25	1.85X18	*	*
3.00-18	4PR 47P TT	3.1/80	24.7/627	386/175	32/2.25	1.85X18		*
3.00-18	6PR 52L TT	3.1/80	24.7/627	440/200	32/2.25	1.85X18	*	*
3.00-18	8PR 55P TT	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*
3.25-18	4PR 52P TT/TL	3.5/89	25.2/639	441/200	33/2.3	2.15X18		*
3.25-18	6PR 59P TT/TL	5.5/89	25.2/639	536/243	40/2.8	2.15X18	*	*



SU-627

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-18	4PR 47P TT	3.1/80	24.7/627	386/175	32/2.25	1.85X18		*
3.00-18	6PR 52L TT	3.1/80	24.7/627	440/200	32/2.25	1.85X18	*	*
3.00-18	8PR 55P TT/TL	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*



SU-643

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.10-18	4PR 58P TT	4.1/104	25.2/639	535/243	32/2.25	2.50X18	*	*
4.10-18	6PR 63P TT	4.1/104	25.2/639	600/272	40/2.8	2.50X18		*
3.00-19	4PR TT	3.1/80	25.7/653	408/185	30/2.3	1.85X19		*
3.00-19	6PR TT	3.1/80	25.7/653	467/212	40/2.8	1.85X19		*
2.75-21	4PR 45P TT	3.0/75	27.1/689	364/165	33/2.3	1.85X21		*
2.75-21	6PR 52P TT	3.0/75	27.1/689	441/200	40/2.8	1.85X21		*



OFF-ROAD TYRES



SU-645

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
3.00-18	4PR 47P TT	3.1/80	24.7/627	386/175	32/2.25	1.85X18		*
3.00-18	6PR 52L TT	3.1/80	24.7/627	440/200	32/2.25	1.85X18	*	*
3.00-18	8PR 55P TT/TL	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*



SU-696

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.75-18	4PR 47P TT	3.0/75	24.1/613	331/150	33/2.3	1.85X18		*
2.75-18	6PR 48L TT	3.0/75	24.1/613	397/180	40/2.8	1.85X18	*	*
2.25-19	4PR 37P TT	2.4/61	23.9/607	282/128	33/2.3	1.60X19		*



SU-700

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
80/100-12	50M TT	3.1/80	18.3/465	419/190	33/2.3	1.85X12		*
90/100-14 (3.00/4.10-14)	49M TT	4.3/108	21.6/548	408/185	33/2.3	1.85X14		*
90/100-16 (3.00/4.10-16)	51M TT	3.8/97	23.1/586	430/195	33/2.3	1.85X16		*
130/90-17 (5.00/5.30-17)	68M TT	5.5/139	26.2/666	694/315	33/2.3	3.00X17		*
100/100-18 (5.00/5.30-18)	59M TT	4.5/115	25.9/657	536/243	33/2.3	2.50X18		*
3.00-18	4PR 47P TT	3.1/80	21.7/627	386/175	33/2.25	1.85X18		*
3.00-18	6PR 52L TT	3.1/80	24.7/627	440/200	33/2.25	1.85X18	*	*
3.00-18	8PR 55P TT	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*
3.25-18	4PR 52P TT	3.5/89	25.2/639	441/200	33/2.3	2.15X18		*
3.25-18	6PR 59P TT	3.5/89	25.2/639	538/213	40/2.8	2.15X18	*	*
100/90-19	62M TT	4.9/124	26.8/681	584/265	33/2.3	2.15X18		*
120/90-19	66M TT	5.3/135	27.5/699	661/300	33/2.3	2.50X19		*

OFF-ROAD TYRES



Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
2.75-18	4PR 42P TT	3.0/75	24.1/613	331/150	32/2.25	1.85X18		*
2.75-18	6PR 48L TT	3.0/75	24.1/613	397/180	32/2.25	1.85X18	*	*
2.75-18	8PR 51P TT	3.0/75	24.1/613	430/195	44/3.1	1.85X18		*
3.00-18	4PR 47P TT	3.1/80	24.7/627	386/175	32/2.25	1.85X18		*
3.00-18	6PR 52L TT	3.1/80	24.7/627	440/200	32/2.25	1.85X18	*	*
3.00-18	8PR 55P TT	3.1/80	24.7/627	481/218	44/3.1	1.85X18		*
3.25-18	4PR 52P TT	3.5/89	25.2/639	441/200	33/2.3	2.15X18		*
3.25-18	6PR 59P TT	3.5/89	25.2/639	536/243	40/2.8	2.15X18	*	*
90/90-18	4PR 51P TT	3.5/90	24.4/619	430/195	32/2.25	2.15X18		*
90/90-18	6PR 57P TT	3.5/90	24.4/619	507/230	32/2.25	2.15X18	*	*



Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
60/100-14 (2.50-14)	38M TT	2.4/6.1	18.7/476	291/132	40/2.8	1.50X14		*
60/100-16 (2.50-16)	38M TT	2.4/6.1	20.7/526	291/132	40/2.8	1.50X14		*
70/100-17 (2.50/2.75-17)	46M TT	3.1/78	22.5/572	374/170	40/2.8	1.60X17		*
70/100-19 (2.50/19)	42M TT	3.1/79	24.5/623	331/150	33/2.3	1.60X19		*
2.75-21	4PR 45P TT	3.0/75	27.1/689	364/165	33/2.3	1.85X21		*
2.75-21	6PR 52P TT	3.0/75	27.1/689	441/200	40/2.8	1.85X21		*
80/100-21 (3.00/21)	4PR 51M TT	3.1/80	27.7/703	430/195	33/2.3	1.85X21		*
80/100-21 (3.00/21)	6PR 57M TT	3.1/80	27.7/703	507/230	40/2.8	1.85X21		*



Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
110/90-16	4PR 59P TT/TL	4.3/109	23.8/604	536/243	33/2.3	2.50X16		*
110/90-16	6PR 65P TT/TL	4.3/109	23.8/604	639/290	40/2.8	2.50X16		*
4.60-17	4PR 61P TT	4.5/114	24.9/632	567/257	33/2.3	2.15X17		*
4.60-17	4PR 66P TT	4.5/114	24.9/632	661/300	40/2.8	2.15X17		*
110/100-18 (4.25/4.60-18)	64M TT	4.9/125	26.7/677	617/280	33/2.3	2.50X18		*
110/90-19	6PR 68M TT	4.9/125	26.8/681	584/265	40/2.8	2.15X19		*



Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.60-18	4PR 63P TT	4.4/111	25.7/654	598/272	33/2.3	2.75X18	*	*
4.60-18	6PR 68P TT	4.4/111	25.7/65	694/315	40/2.8	2.75X18		*



THREE WHEELS TYRES



SU-043

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.00-8	4PR 55F TT	4.1/105	16.3/415	481/218	36/2.5	2.50X8		*
4.00-8	6PR 60F TT	4.1/105	16.3/415	551/250	40/2.8	2.50X8		*
4.00-8	8PR 62F TT	4.1/105	16.3/415	583/265	42/3.0	2.50X8	*	*



SU-648

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.00-8	4PR 55F TT	4.1/105	16.3/415	481/218	36/2.5	2.50X8		*
4.00-8	6PR 60F TT	4.1/105	16.3/415	551/250	40/2.8	2.50X8		*
4.00-8	8PR 62F TT	4.1/105	16.3/415	583/265	42/3.0	2.50X8	*	*



SU-663

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.00-8	4PR 55F TT	4.1/105	16.3/415	481/218	36/2.5	2.50X8		*
4.00-8	6PR 60F TT	4.1/105	16.3/415	551/250	40/2.8	2.50X8		*
4.00-8	8PR 62F TT	4.1/105	16.3/415	583/265	42/3.0	2.50X8	*	*



SU-311

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.00-8	4PR 55F TT	4.1/105	16.3/415	481/218	36/2.5	2.50X8		*
4.00-8	6PR 60F TT	4.1/105	16.3/415	551/250	40/2.8	2.50X8		*
4.00-8	8PR 62F TT	4.1/105	16.3/415	583/265	42/3.0	2.50X8	*	*



THREE WHEELS TYRES



Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.00-8	4PR 55F TT	4.1/105	16.3/415	481/218	36/2.5	2.50X8		*
4.00-8	6PR 60F TT	4.1/105	16.3/415	551/250	40/2.8	2.50X8		*
4.00-8	8PR 62F TT	4.1/105	16.3/415	583/265	42/3.0	2.50X8	*	*



Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.00-8	4PR 55F TT	4.1/105	16.3/415	481/218	36/2.5	2.50X8		*
4.00-8	6PR 60F TT	4.1/105	16.3/415	551/250	40/2.8	2.50X8		*
4.00-8	8PR 62F TT	4.1/105	16.3/415	583/265	42/3.0	2.50X8	*	*



Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.50-12	4PR TT	5.0/127	21.3/542	567/257	33/2.3	3.00X12		*
4.50-12	6PR TT	5.0/127	21.3/542	783/355	44/4.1	3.00X12		*
4.50-12	8PR TT	5.0/127	21.3/542	915/415	58/4.1	3.00X12		*





THREE WHEELS TYRES



SU-139

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
5.00-12	6PR TT	5.6/143	22.4/568	915/415	44/3.1	3.50X12		*
5.00-12	8PR TT	5.6/143	22.4/568	1069/484	58/4.1	3.50X12		*



SU-149

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.50-12	4PR TT	5.0/127	21.3/542	567/257	33/2.3	3.00X12		*
4.50-12	6PR TT	5.0/127	21.3/542	783/355	44/3.1	3.00X12		*
4.50-12	8PR TT	5.0/127	21.3/542	915/415	58/4.1	3.00X12		*
5.00-12	6PR TT	5.6/143	22.4/568	915/415	44/3.1	3.50X12		*
5.00-12	8PR TT	5.6/143	22.4/568	1069/484	58/4.1	3.50X12		*



SU-402

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
5.00-12	6PR TT	5.6/143	22.4/568	915/415	44/3.1	3.50X12		*
5.00-12	8PR TT	5.6/143	22.4/568	1069/484	58/4.1	3.50X12		*



SU-501A

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.00-12	6PR TT	4.1/105	20.4/517	739/335	40/2.8	2.50X12		*
4.00-12	8PR TT	4.1/105	20.4/517	783/355	44/3.1	2.50X12		*
4.50-12	4PR TT	5.0/127	21.3/542	567/257	33/2.3	3.00X12		*
4.50-12	6PR TT	5.0/127	21.3/542	783/355	44/4.1	3.00X12		*
4.50-12	8PR TT	5.0/127	21.3/542	915/415	58/4.1	3.00X12		*
4.50-12	6PR TT	4.7/120	23.3/596	882/400	46/3.2	3.00X14		*



THREE WHEELS TYRES



SU-501B

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.50-12	6PR TT	4.7/120	23.5/596	882/400	46/3.2	3.00X14		*
5.00-14	6PR TT	5.6/143	24.3/618	1068/484	46/3.2	3.50X12		*



SU-503

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.50-12	4PR TT	5.0/127	21.3/542	567/257	33/2.3	3.00X12		*
4.50-12	6PR TT	5.0/127	21.3/542	783/355	44/3.1	3.00X12		*
4.50-12	8PR TT	5.0/127	21.3/542	915/415	58/4.1	3.00X12		*



SU-690

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.50-10	4PR TT/TL	5.0/127	19.2/486	716/325	36/2.5	3.00X10		*
4.50-10	6PR TT/TL	5.0/127	19.2/486	827/375	40/2.8	3.00X10		*





THREE WHEELS TYRES



SU-666

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.00-8	4PR 55F TT	4.1/105	16.3/415	481/218	36/2.5	2.50X8		*
4.00-8	6PR 60F TT	4.1/105	16.3/415	551/250	40/2.8	2.50X8		*
4.00-8	8PR 62F TT	4.1/105	16.3/415	283/265	42/3.0	2.50X8	*	*
4.00-10	4PR TT	4.1/105	18.3/466	551/250	36/2.5	2.50X10	*	*
4.00-12	6PR TT	4.1/105	20.4/517	739/335	40/2.8	2.50X12		*
4.00-12	8PR TT	4.1/105	20.4/517	783/355	44/3.1	2.50X12		*
3.00-16	4PR 43P TT	3.1/80	22.7/576	342/155	33/2.3	1.85X16		*
3.00-16	6PR 48P TT	3.1/80	22.7/576	419/190	40/2.8	1.85X16		*
3.25-15	4PR 48P TT	3.5/89	23.1/588	397/180	33/2.3	2.15X16		*
3.25-16	6PR 55P TT	3.5/89	23.1/588	481/218	40/2.8	2.15X16		*
2.75-17	4PR 41P TT/TL	3.0/75	23.1/588	320/145	33/2.3	1.85X17		*
2.75-17	6PR 47P TT/TL	3.0/75	23.1/588	386/175	40/2.3	1.85X17		*
3.00-17	4PR 45P TT	3.1/80	23.7/602	364/165	33/2.3	1.85X17		*
3.00-17	6PR 50P TT	3.1/80	23.7/602	419/190	40/2.8	1.85X17	*	*



SU-730

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
4.80-8	4PR TT/TL	4.9/124	17.4/442	584/265	36/2.5	3.75X8	*	*
4.00-10	4PR TT/TL	4.1/105	18.3/466	551/250	36/2.5	2.50X10	*	*
4.50-10	4PR TT/TL	5.0/127	19.2/486	716/325	36/2.5	3.00X10	*	
4.50-10	6PR TT/TL	5.0/127	19.2/486	827/375	40/2.8	3.00X10		
5.00-10	4PR TT/TL	5.6/143	20.3/524	783/355	36/2.5	3.50X10	*	
5.00-10	6PR TT/TL	5.6/143	20.3/524	935/425	40/2.8	3.50X10		



SU-731

Size	Ply Rating	S.W (INCH/MM)	O. D. (INCH/MM)	Max Load Capacity (LBS/KGS)	Max. P.S.I./KGF/CM ²	Rim (INCH)	E MARK	DOT
6.00-9	6PR TT/TL	6.0/154	20.9/532	1373/624	85/5.8	4.00X9	*	*



SU-742

Size	Type
120/70-21	TT/TL
130/90-16	TT/TL



SU-719

Size	Type
3.50-10	TT/TL



SU-740

Size	Type
4.00-8	TT/TL



SU-741

Size	Type
4.00-8	TT/TL



SU-738

Size	Type
2.75-17	TT/TL



SU-739

Size	Type
2.75-18	TT/TL
3.00-18	TT/TL



SU-736

Size	Type
3.00-18	TT/TL



SU-737

Size	Type
3.00-18	TT/TL





SU-745

110/80-19



SU-746

110/90-19



SU-104

100/70-17 140/60-17



SU-747

110/90-19



SU-143

3.25-16



SU-160TI

110/90-19



SU-402

5.00-12



SU-748

80/100-21



SU-706

2.75-18 3.00-18



SU-749

120/100-18



SU-1601

3.00-18



SU-750

80/100-21



SU-751

80/100-21



SU-736

3.00-17





TUBES



SIZE	WEIGHT(Kg)	VALVE TYPE	SIZE	WEIGHT(Kg)	VALVE TYPE
2.50-14	0.32	TR4	100/90-17	0.53	TR4
2.50-16	0.34	TR4	100/90-18	0.55	TR4
2.00-17	0.32	TR4	90/90-19	0.55	TR4
2.25-17	0.34	TR4	110/90-16(4.25-16)	0.66	TR4
2.50-17	0.37	TR4	110/90-17	0.69	TR4
2.50-18	0.39	TR4	130/90-15	0.70	TR4
2.75-14	0.38	TR4	130/60-13	0.57	TR87
2.75-16	0.40	TR4	120/130/70-12	0.56	TR87
2.75-17	0.42	TR4	130/70-13	0.58	TR87
2.75-18	0.44	TR4	3.00-8	0.30	TR87
3.00-12	0.40	TR4	3.50-8	0.32	TR87
3.00-14	0.44	TR4	4.00-8	0.39	TR87
3.00-16	0.46	TR4	2.75-10	0.32	TR87
3.00-17	0.48	TR4	3.00-10	0.33	TR87
3.00-18	0.50	TR4	3.50-10	0.37	TR87
2.75/3.00-19	0.51	TR4	4.00/4.50-12	0.65	TR13
2.75/3.00-21	0.53	TR4	4.50/5.00-12	0.78	TR13
3.25-16	0.50	TR4	4.60-17	0.75	TR4
3.50-16	0.52	TR4	4.60-18	0.78	TR4
3.50-17	0.55	TR4	2.00-18	0.33	TR4
3.50-18	0.57	TR4	2.25-16	0.32	TR4
3.75-19	0.76	TR4	90/90-18	0.53	TR4
4.10-18	0.68	TR4	90/90-17	0.51	TR4

MOTORCYCLE TUBES







MOTORCYCLE NATURAL RUBBER/BUTYL TUBES

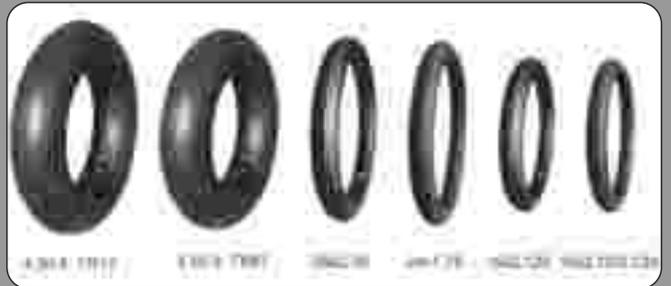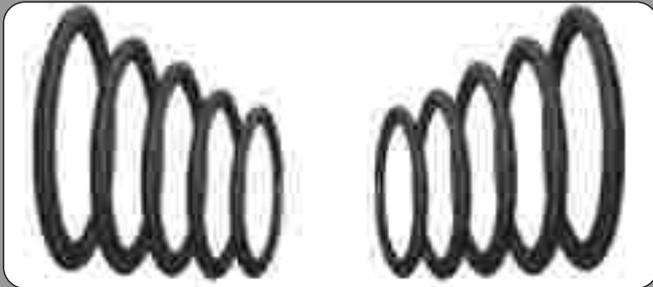

MOTORCYCLE TUBES



MOTORCYCLE SPARE PARTS

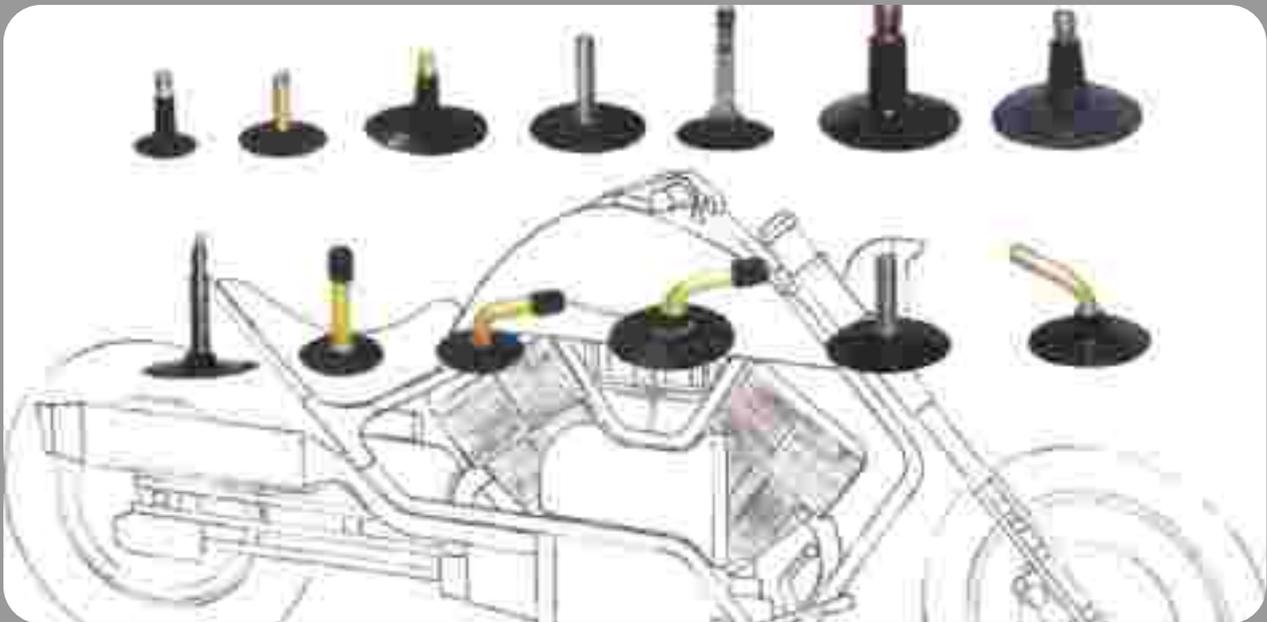



STRONG R&D STRENGTH
SCIENTIFIC **M**ODERN EQUIPMENT
MANAGEMENT **T**.
CREATING **F**IRST
CLASS PRODUCTS





Sunik International Pvt. Ltd.

Email : sales@sunikmotors.com

Web.: www.sunikmotors.com www.suniktires.com

DSM 338, DLF TOWER,
SHIVAJI MARG, NEW DELHI(INDIA)
PIN CODE : 110015
TEL.: +91-1143041774

